



Development of a Novel High Blast / High Fragmentation Melt Pour Explosive

Steven Nicolich and John Niles

US Army Armaments, Research, Development and Engineering Center

Tank Automotive and Armaments Command

Dr. Daniel Doll and Melissa Ray

Thiokol Propulsion

ATK Corporation

Mike Gunger and Art Spencer

General Dynamics – OTS Corporation

Background

- The vast majority of cannon launched unitary warheads use melt pour explosives for cost and surge capability
- Traditional melt pour explosives have focused on fragmentation capability
 - TNT
 - Composition B
- A new family of low cost reduced sensitivity melt pour explosives based on 2,4-dinitroanisole, RDX or HMX and AP has been developed in response to IM requirements
 - PAX-21 - Composition B replacement (in production for 60mm mortar)
 - PAX-24 - TNT replacement
 - PAX-25 - Composition B replacement
 - PAX-28 - Dual purpose

Technical Approach

- Start with proven DNANs/AP system
 - Add Al for blast effect
 - Investigate levels of solids for performance/processibility
 - Evaluate effect of RDX versus HMX
- Compare to typical existing formulations
 - Composition B
 - PBXN-109
- Formulate the most promising compositions and test
 - Bench performance tests for fragmentation
 - Blast tests

Results

- A practical, dual purpose, melt pour explosive has been developed (PAX-28)
- Excellent blast characteristics
- Excellent bench scale fragmentation performance
- Good IM performance

Future Work

- Validate expected fragmentation performance
 - Pit tests in several fragmentation munitions
 - Quantity and mass distribution of fragments
 - Arena tests in target munitions based upon user requirements
 - Quantity, mass distribution, velocity and orientation of fragments
- Perform system level demonstrations
- Perform IM testing

Results: Initial Mixes


Table 1: Formulations Evaluated by Mix Number

Mix #	DNANs	RDX or HMX	AP	AI	RDX (wt%) Of RDX&AI
HMX Containing					
1	35	35	15	15	
17	35	35	15	15	
20	35	35	15	15	
RDX Containing					
30	40	20	20	20	50.00
31	40	30	20	10	75.00
32	40	30	15	15	66.67
33	40	50	0	10	83.33
34	40	30	0	30	50.00
35	40	10	0	50	16.67
36	40	0	0	60	0.00
37	40	27.5	0	32.5	45.83
38	40	17	10	33	34.00
39	40	11.5	15	33.5	25.56
40	40	6.4	20	33.6	16.00
41	40	0	30	30	0.00
42*	40	22.5	0	37.5	37.50
43*	40	40	0	20	66.67
44	40	12.5	10	37.5	25.00
45	40	25	10	25	50.00
46	40	5	15	40	11.11
47	40	15	15	30	33.33
48	40	5	20	35	12.50
49	40	10	20	30	25.00
50	40	7.5	30	22.5	25.00
51	40	25	20	15	62.50
52	40	13	30	18	41.94
53	40	16.5	30	13.5	55.00

*Mixes were not made because it was determined that enough data was present on formulations containing 0% AP. These were fully evaluated theoretically.

Results: Total Energy – RDX v Al at varying levels of AP


Figure 2: Theoretical Total Energy of Detonation as RDX is exchanged for Al at varying AP levels and 40% DNANs

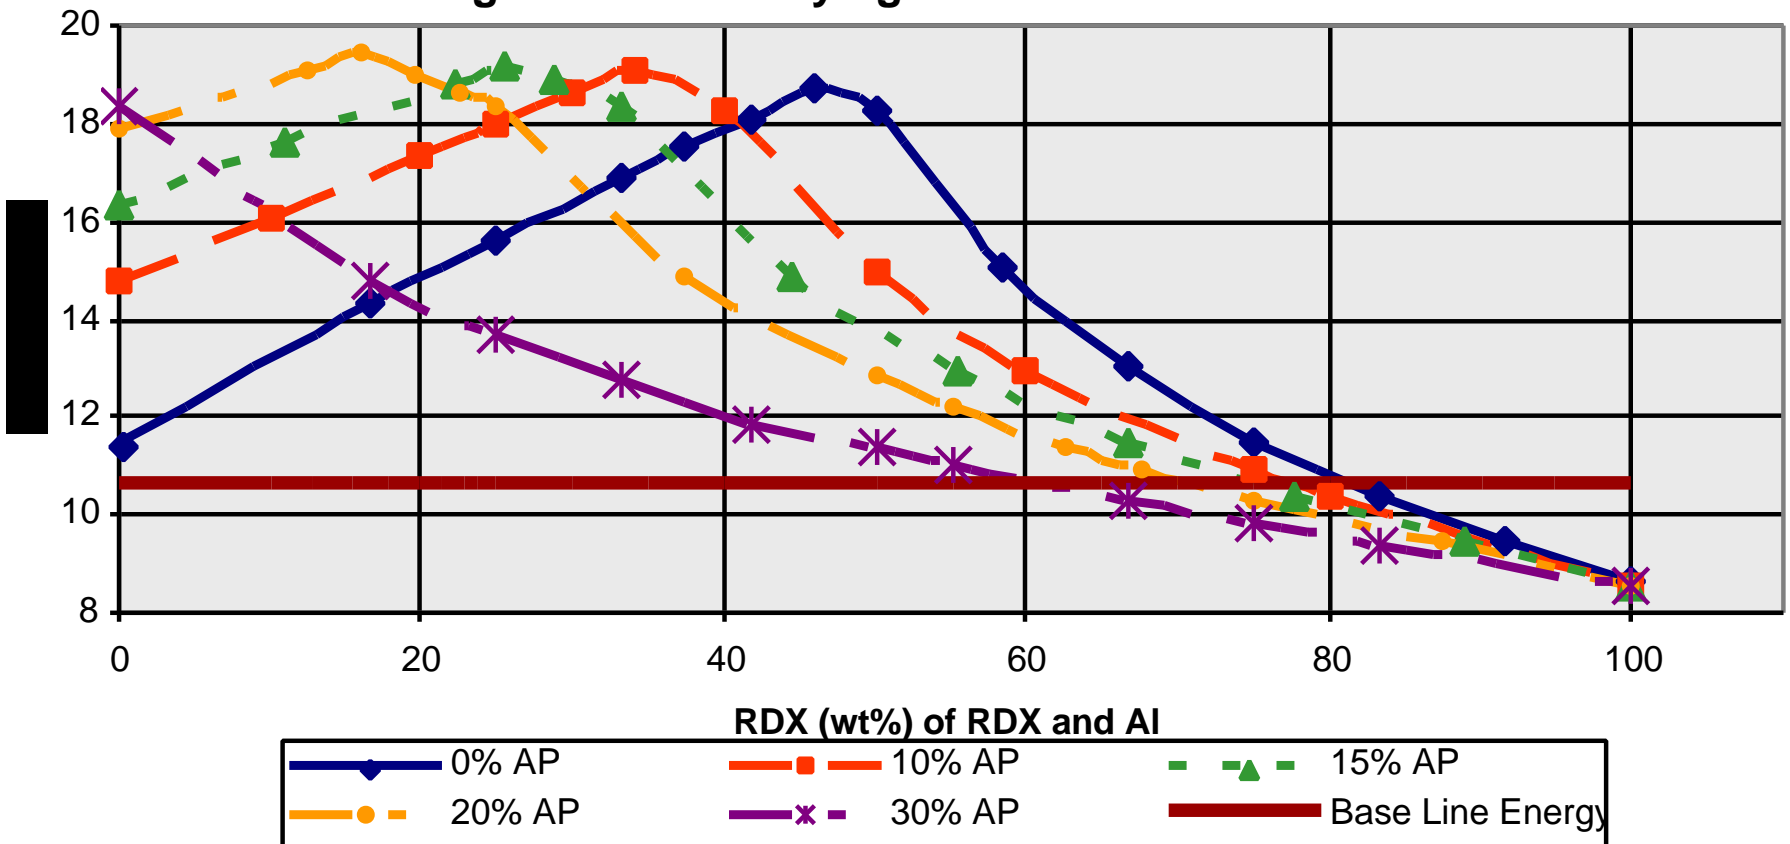

Results: Theoretical Velocity v Theoretical Energy


Figure 4: Theoretical Velocity versus Theoretical Energy for 0% AP & 40% DNANs

(left most Point on each is smallest wt% RDX of RDX & Al and increases from there)

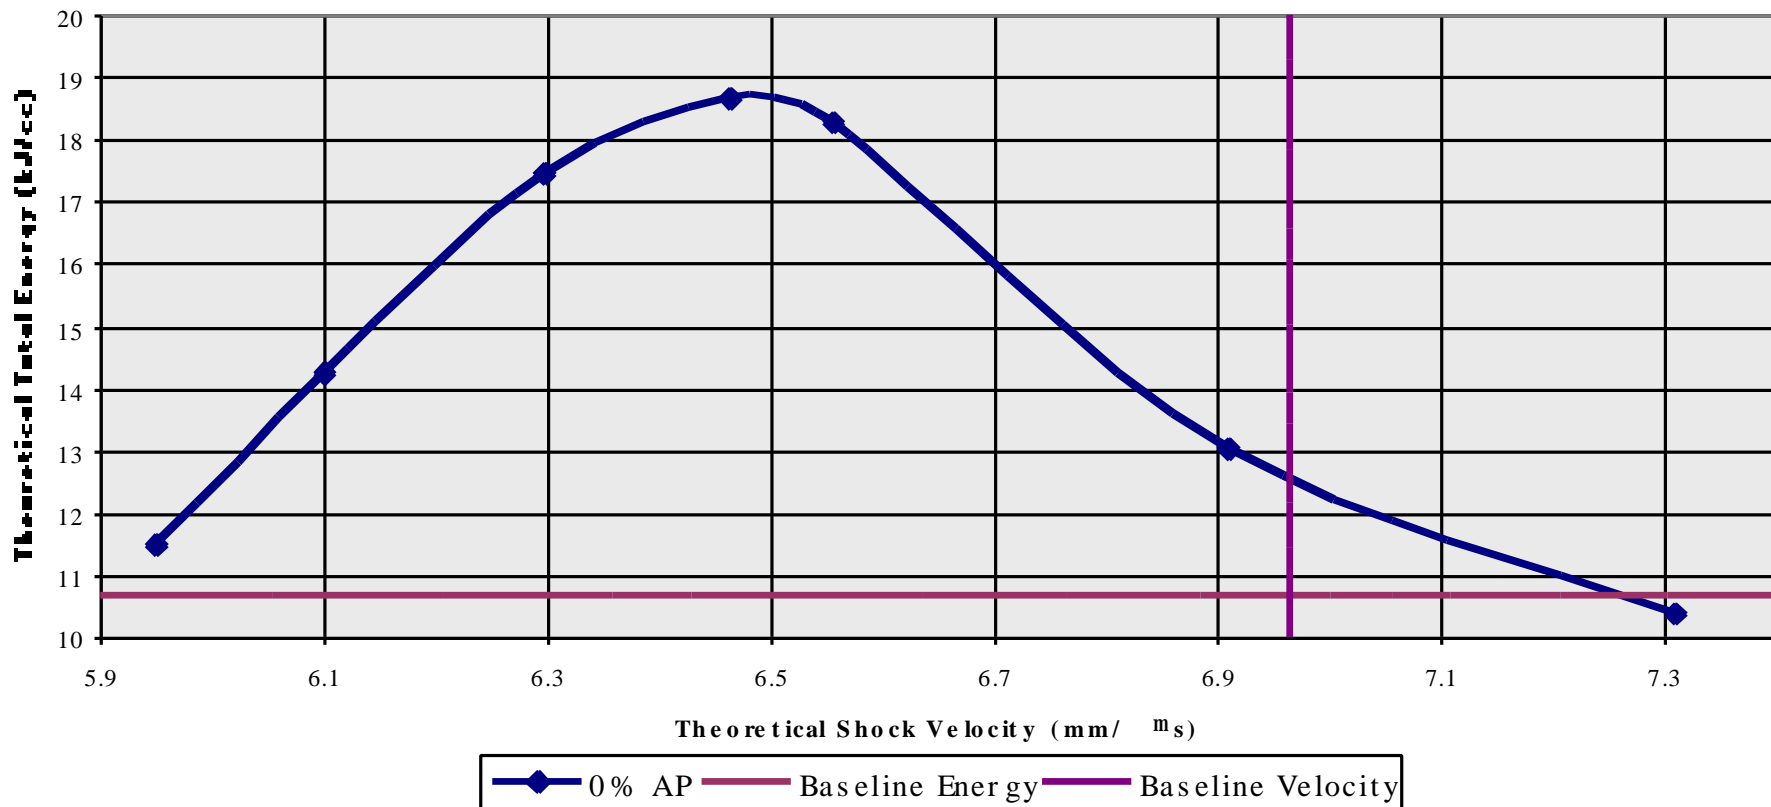


Results: Theoretical Velocity v Theoretical Energy

Figure 5: Theoretical Velocity versus Theoretical Energy
(Left most Point on each is smallest wt% RDX of RDX & AI and increases from there)

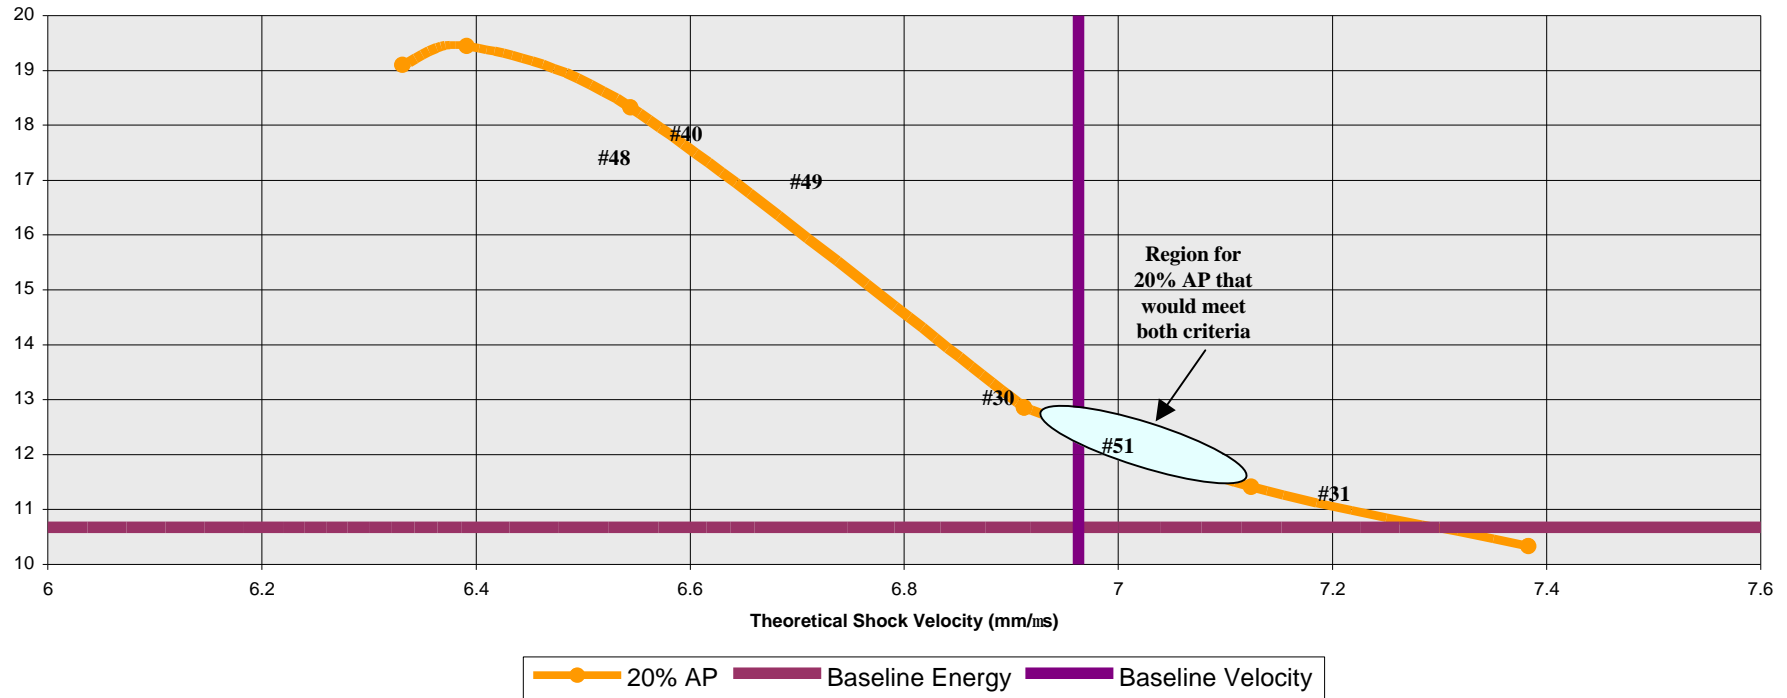



Results: Dent Depth

Figure 6: RDX (wt%) of RDX and AI vs. Experimental Dent Depth for varying AP concentrations

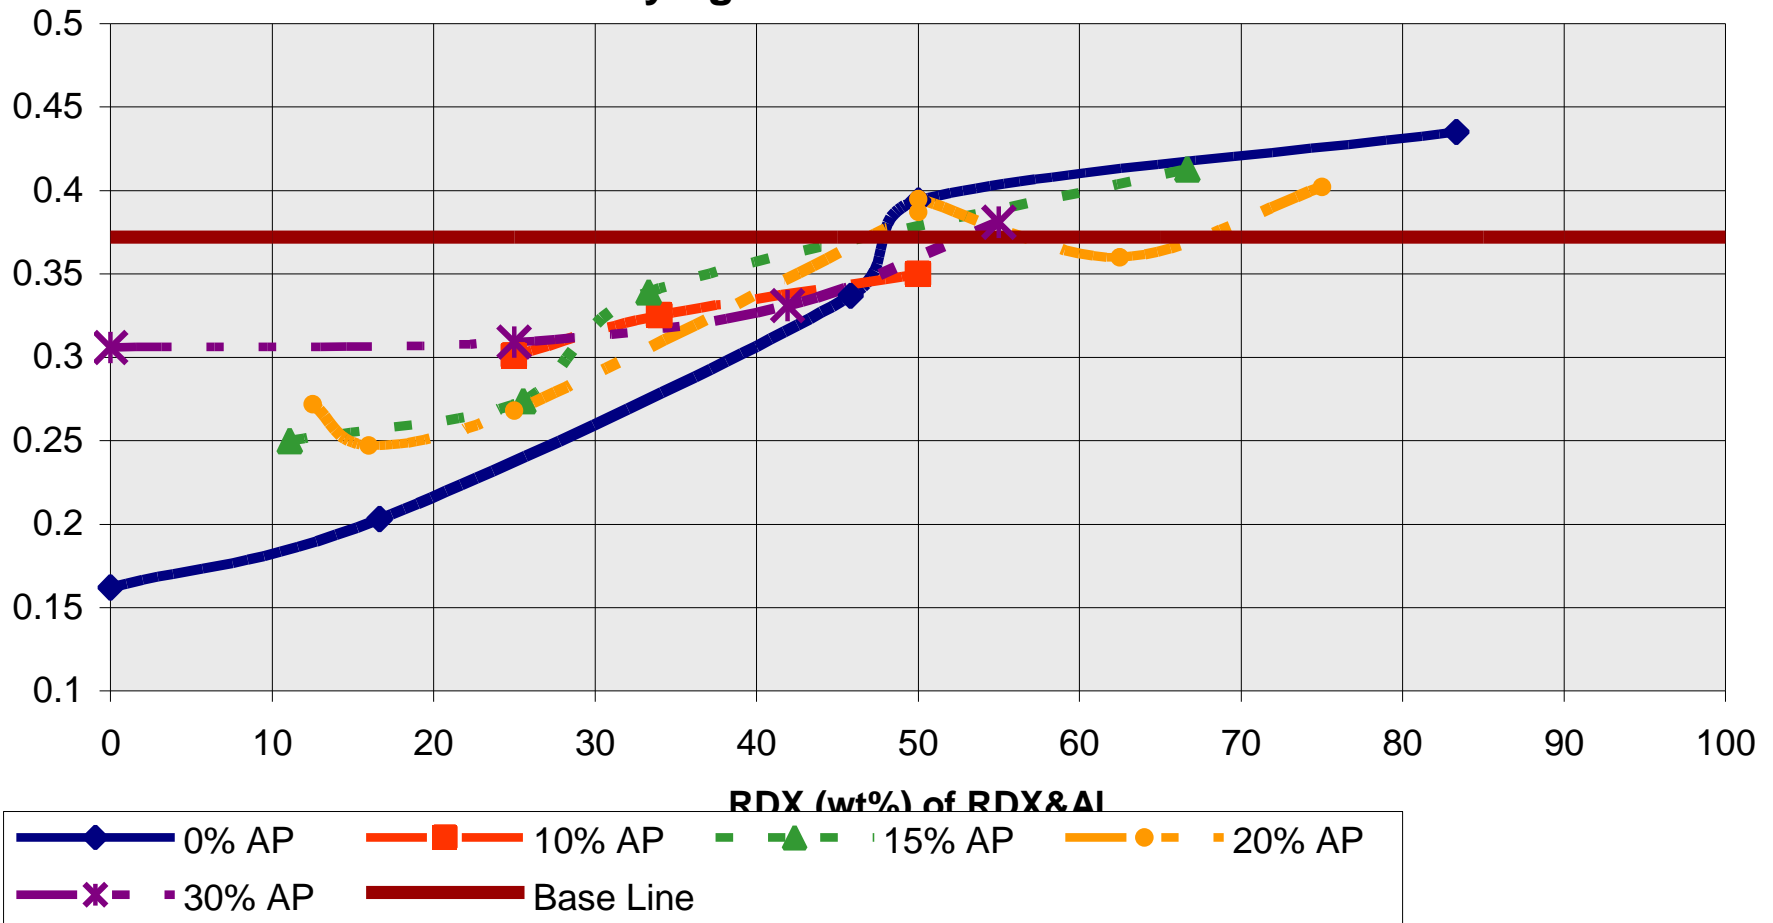

Results: RDX/Al Concentration v Experimental Velocity

Figure 7: RDX (wt%) of RDX and Al vs. Experimental Velocity for varying AP concentrations

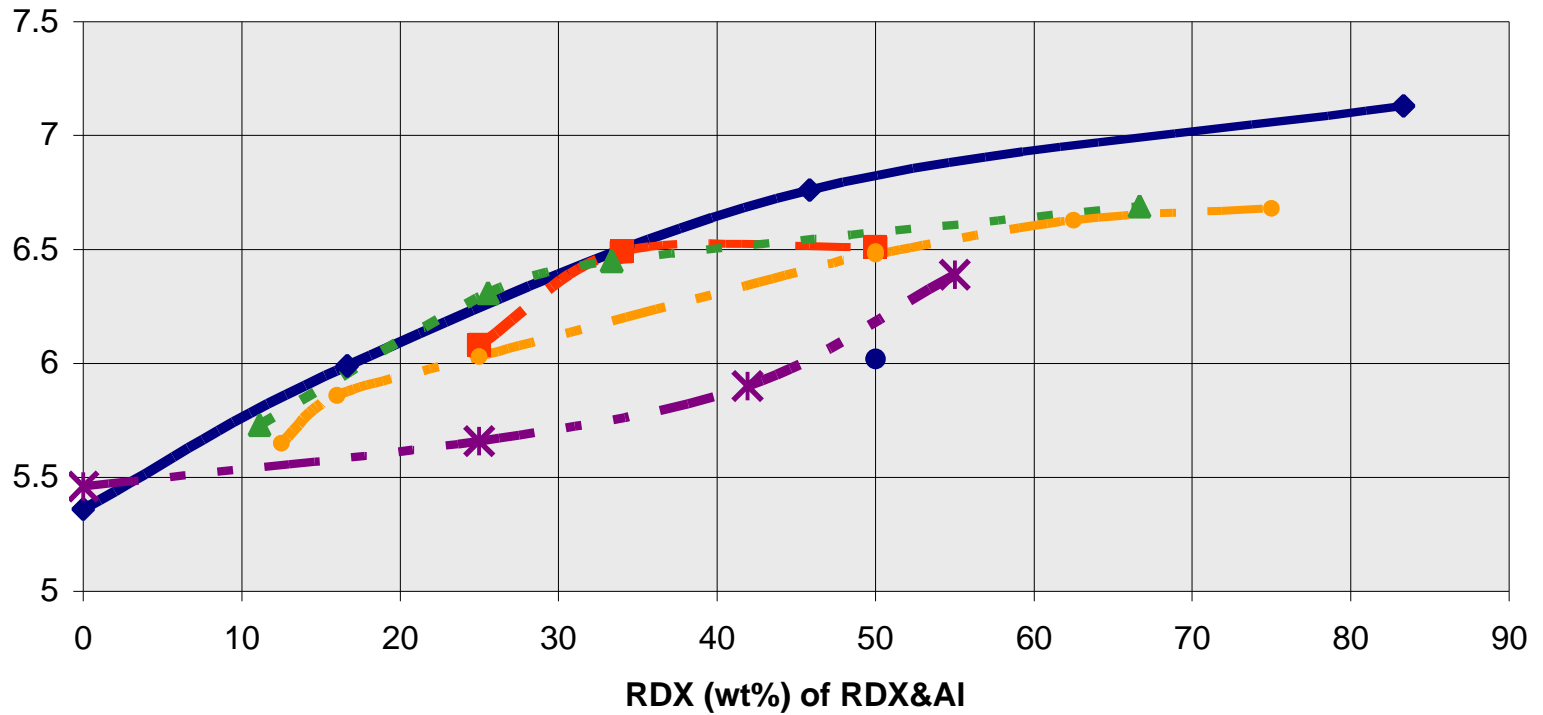


Results: Experimental Velocity & Dent v RDX

Table 6: Experimental Velocity and Dent Depth Increases With Increasing levels of RDX and Similar Levels of AP				
Mix #	RDX	AP	% velocity increased	% dent depth increased
44*	12.5	10		
38	17	10	6.3	7.4
45	25	10	6.6	14
46*	5	15		
39	11.5	15	9.2	8.8
47	15	15	11.2	26.3
49*	10	20		
30	20	20	6.9	32.2
31	30	20	9.7	33.3

* Mix numbers following in the same color set are percent of these i.e. the velocity of 38 is 6.3% greater than the velocity of 44


Results: Average Velocity v Dent Depth

Figure 8: Average Velocity versus Dent Depth
(Left most Point on each is smallest wt% RDX of RDX & Al and increases from there)

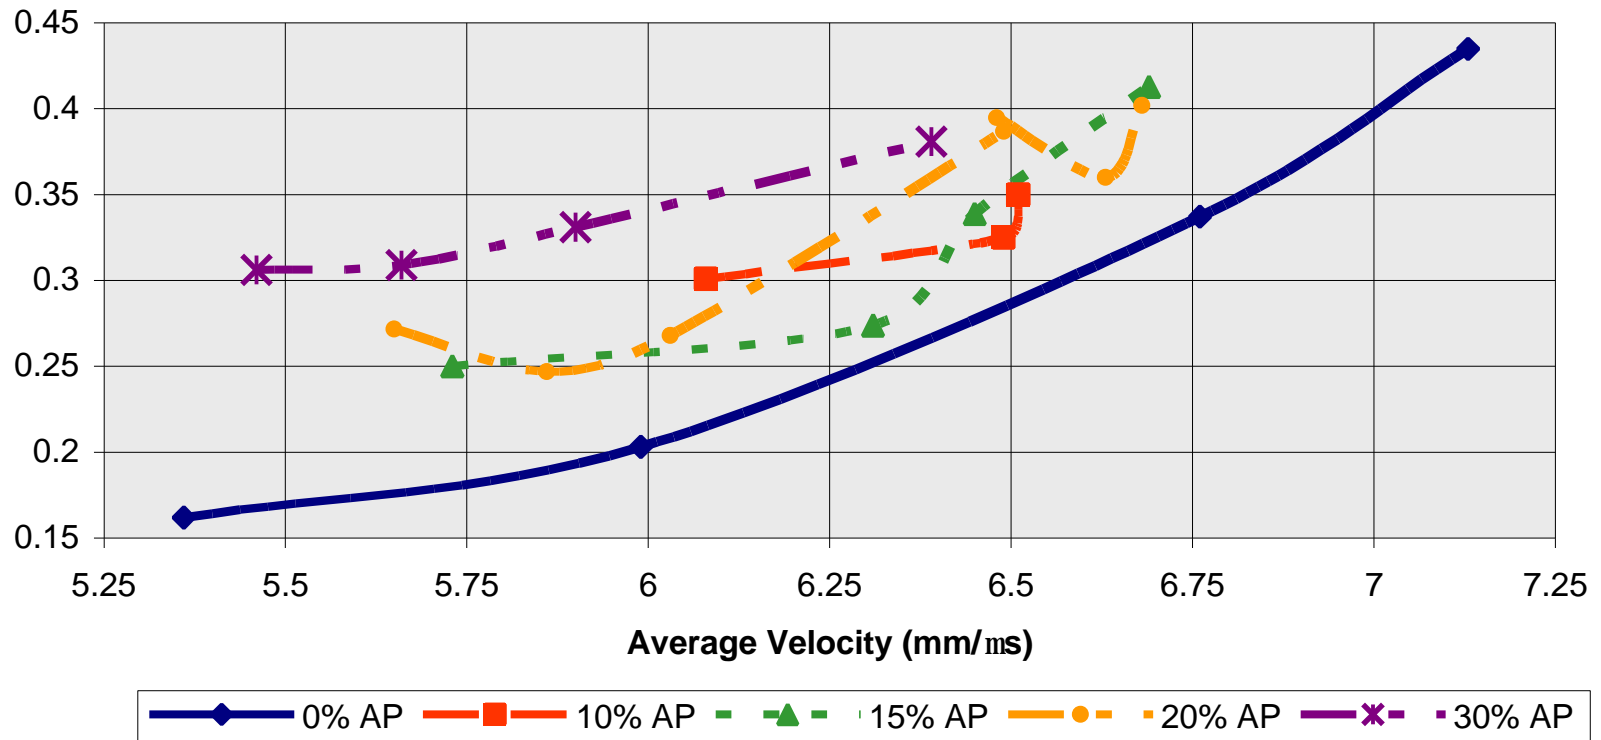

Results: Card Gap

Figure 10: RDX (wt%) of RDX and AI vs. Experimental NOL Card Gap for varying AP concentrations

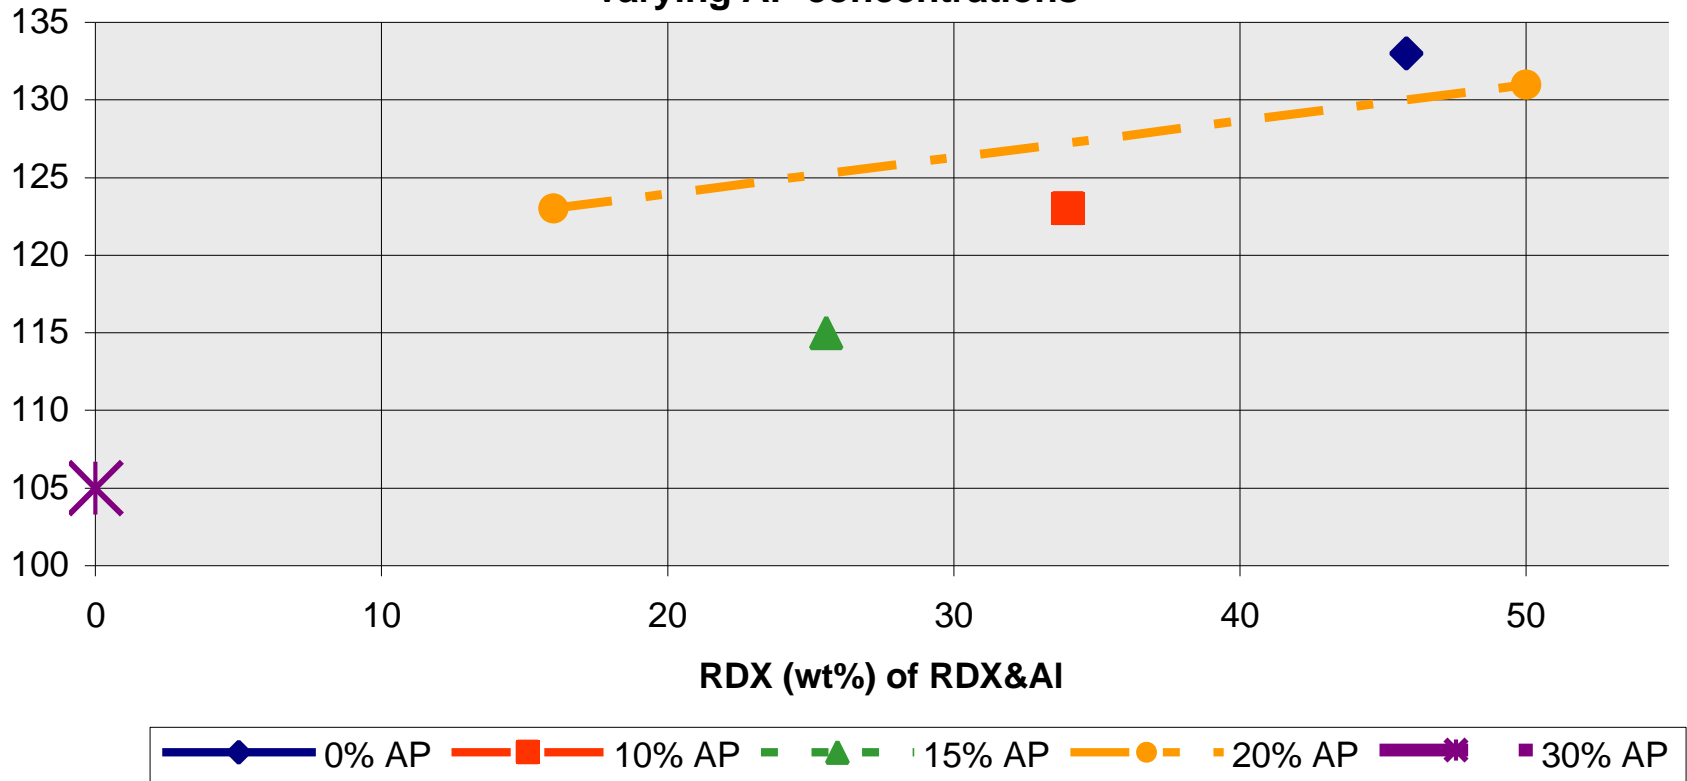

Results: The Bottom Line

Table 1. Average Peak Pressure

Explosive	Nominal N.E.W. (lbs)	Average Peak Pressure (psi)			
		10'	20'	30'	40'
Comp B	9.1	30.4	6.7	3.0	3.0
PAX-28	9.6	39.5	7.4	5.7	3.3
PAX-28	12.6	57.0	9.2	7.4	5.5

NEW used for PAX-28 was based upon an anticipated requirement

**An equivalency factor of 1.62 was determined between
Composition B and PAX-28**

Results: Blast Equivalence Factors

Table 2. Factors for Equivalent Weight of Composition B

Explosive	Equivalent Comp B Factor
PBXN-109	1.19
Tritonal	1.09
AFX-777	1.47
AFX-757	1.39
PAX-28	1.62