

# 52<sup>nd</sup> FUZE CONFERENCE



**Raytheon**

**EXCALIBUR**



**M982**



Presented by:  
Mr. Perry Salyers


May 13-15, 2008




# OUTLINE

- ERGM System Overview
- ERGM System Operation
- M982 System Overview
- M982 System Operation
- System Target & Excalibur Characteristics
- M982 Fuzing System
- S&A Technical Requirements
- MIL-STD-1316 Compliance
  - Excalibur FSA Time Line
  - Excalibur FSA Logic Design
- Fuze Safe & Arm Description
- S&A Mechanical Design
- S&A Electrical Design
- Electrical Module
- S&A Integration
- S&A Explosive Outputs
- HOB Sensor Description
- FS&A Description
- Program Test Results / Milestones
- ESAD Development Status


# EX171 ERGM Tactical System

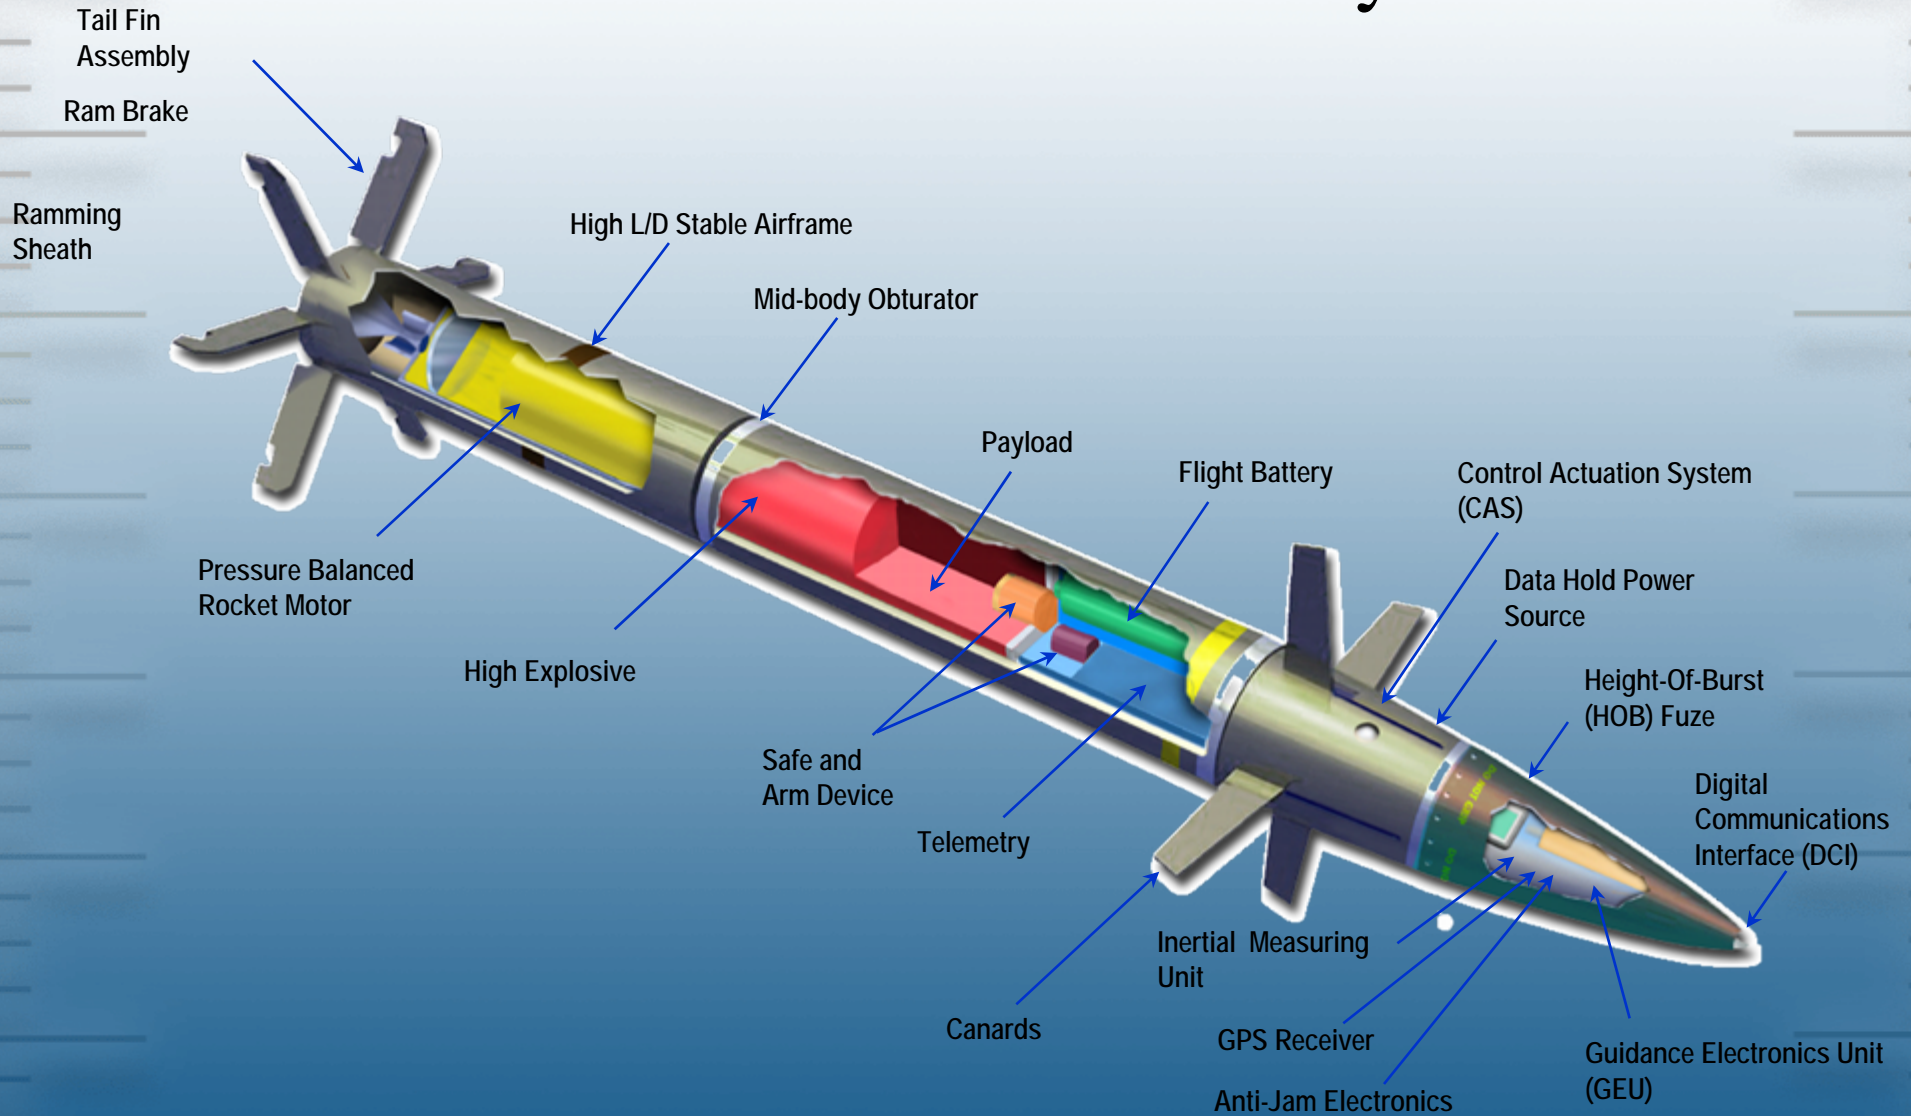

# EX171 ERGM OPERATIONAL CONCEPT

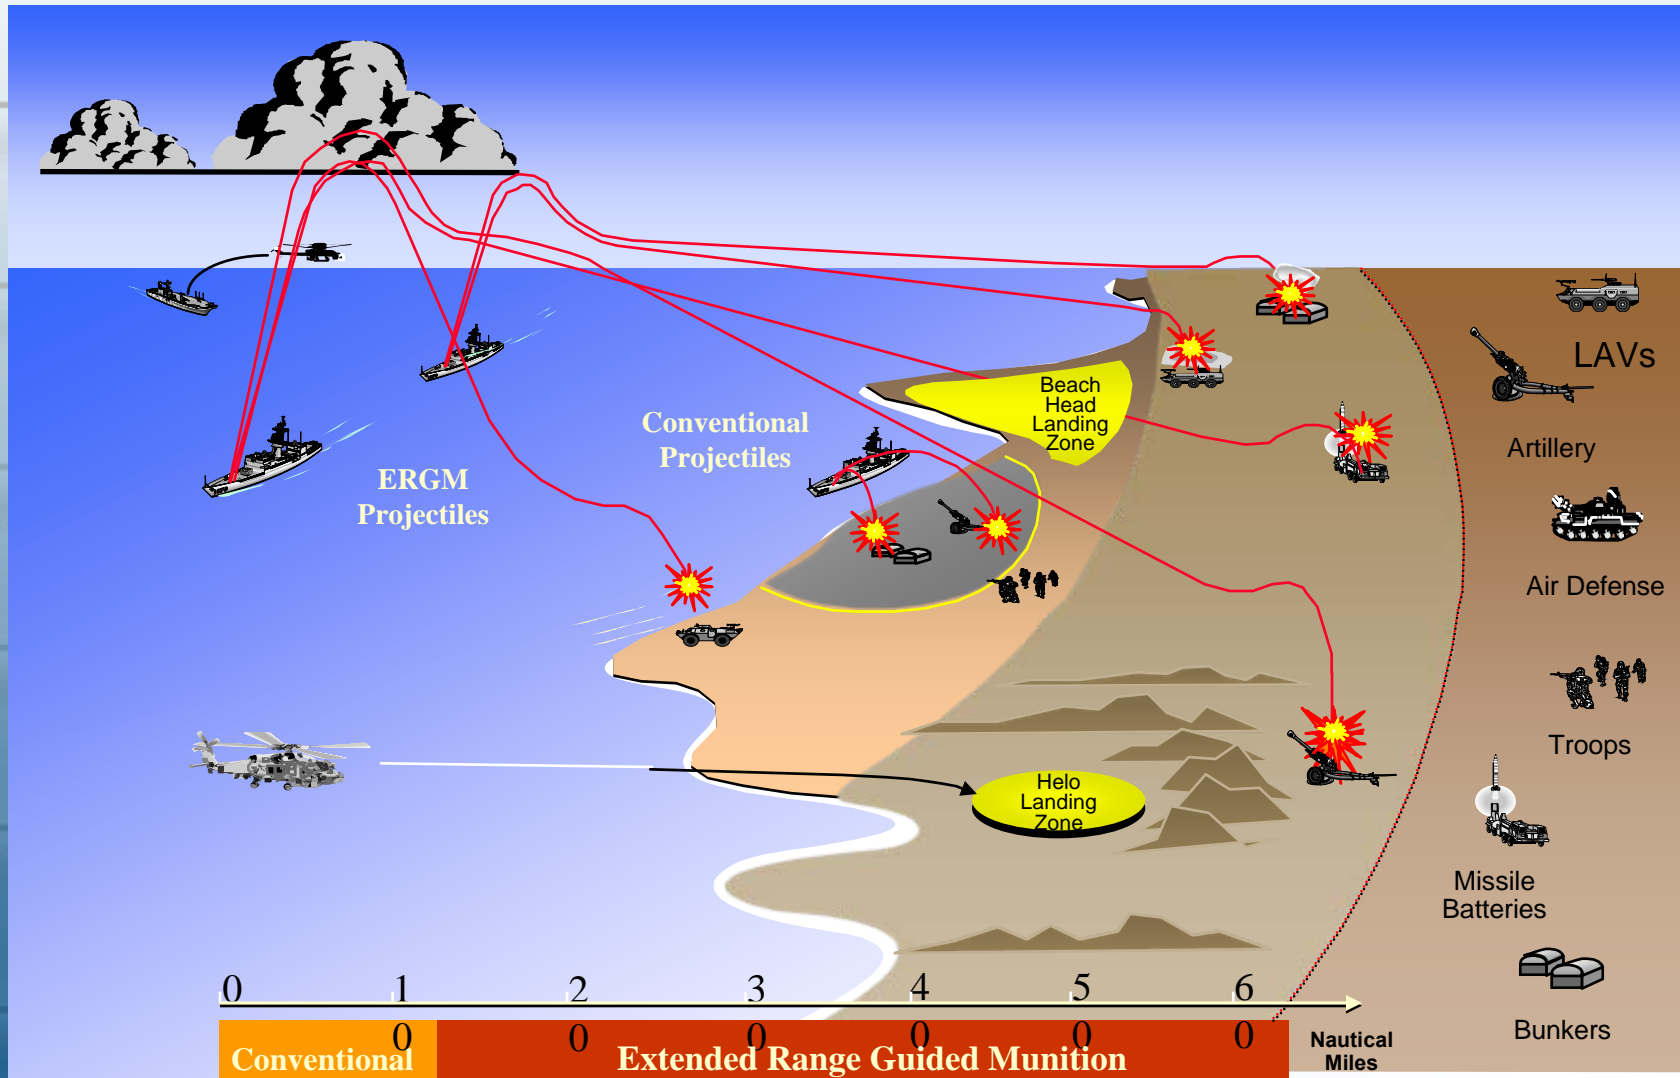


# Excalibur (M982) System Overview

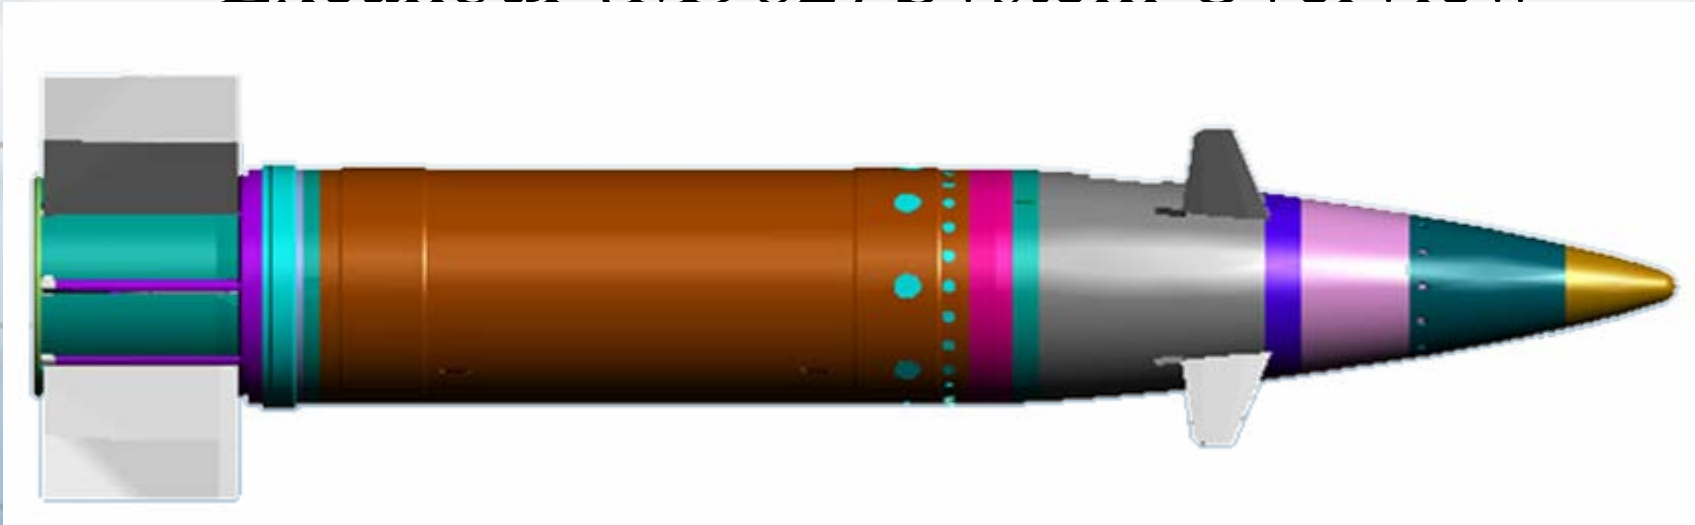

## Characteristics/Description:

- 155MM Extended Range guided projectile
- Fin Stabilized Glide Air Frame
- Inductive Set with Enhanced Setter
- Inertial Navigation System (INS) Guidance
  - All Weather, Day and Night
  - Compatible with JLW155 & FCS Digitized
- 155mm Platforms
  - One Meter Length / 106 lb
- Warhead: Unitary
- Accuracy: 10m CEP objective
- Range: 40Km objective
- Targets : Personnel, light materiel, structures
- Fuze modes: PD, PD delay, Prox
- Environments:
  - 15.5 KG set back
    - Early fielding ~12KG
  - 50+ KG penetration

# Excalibur Unitary Concept of Operations

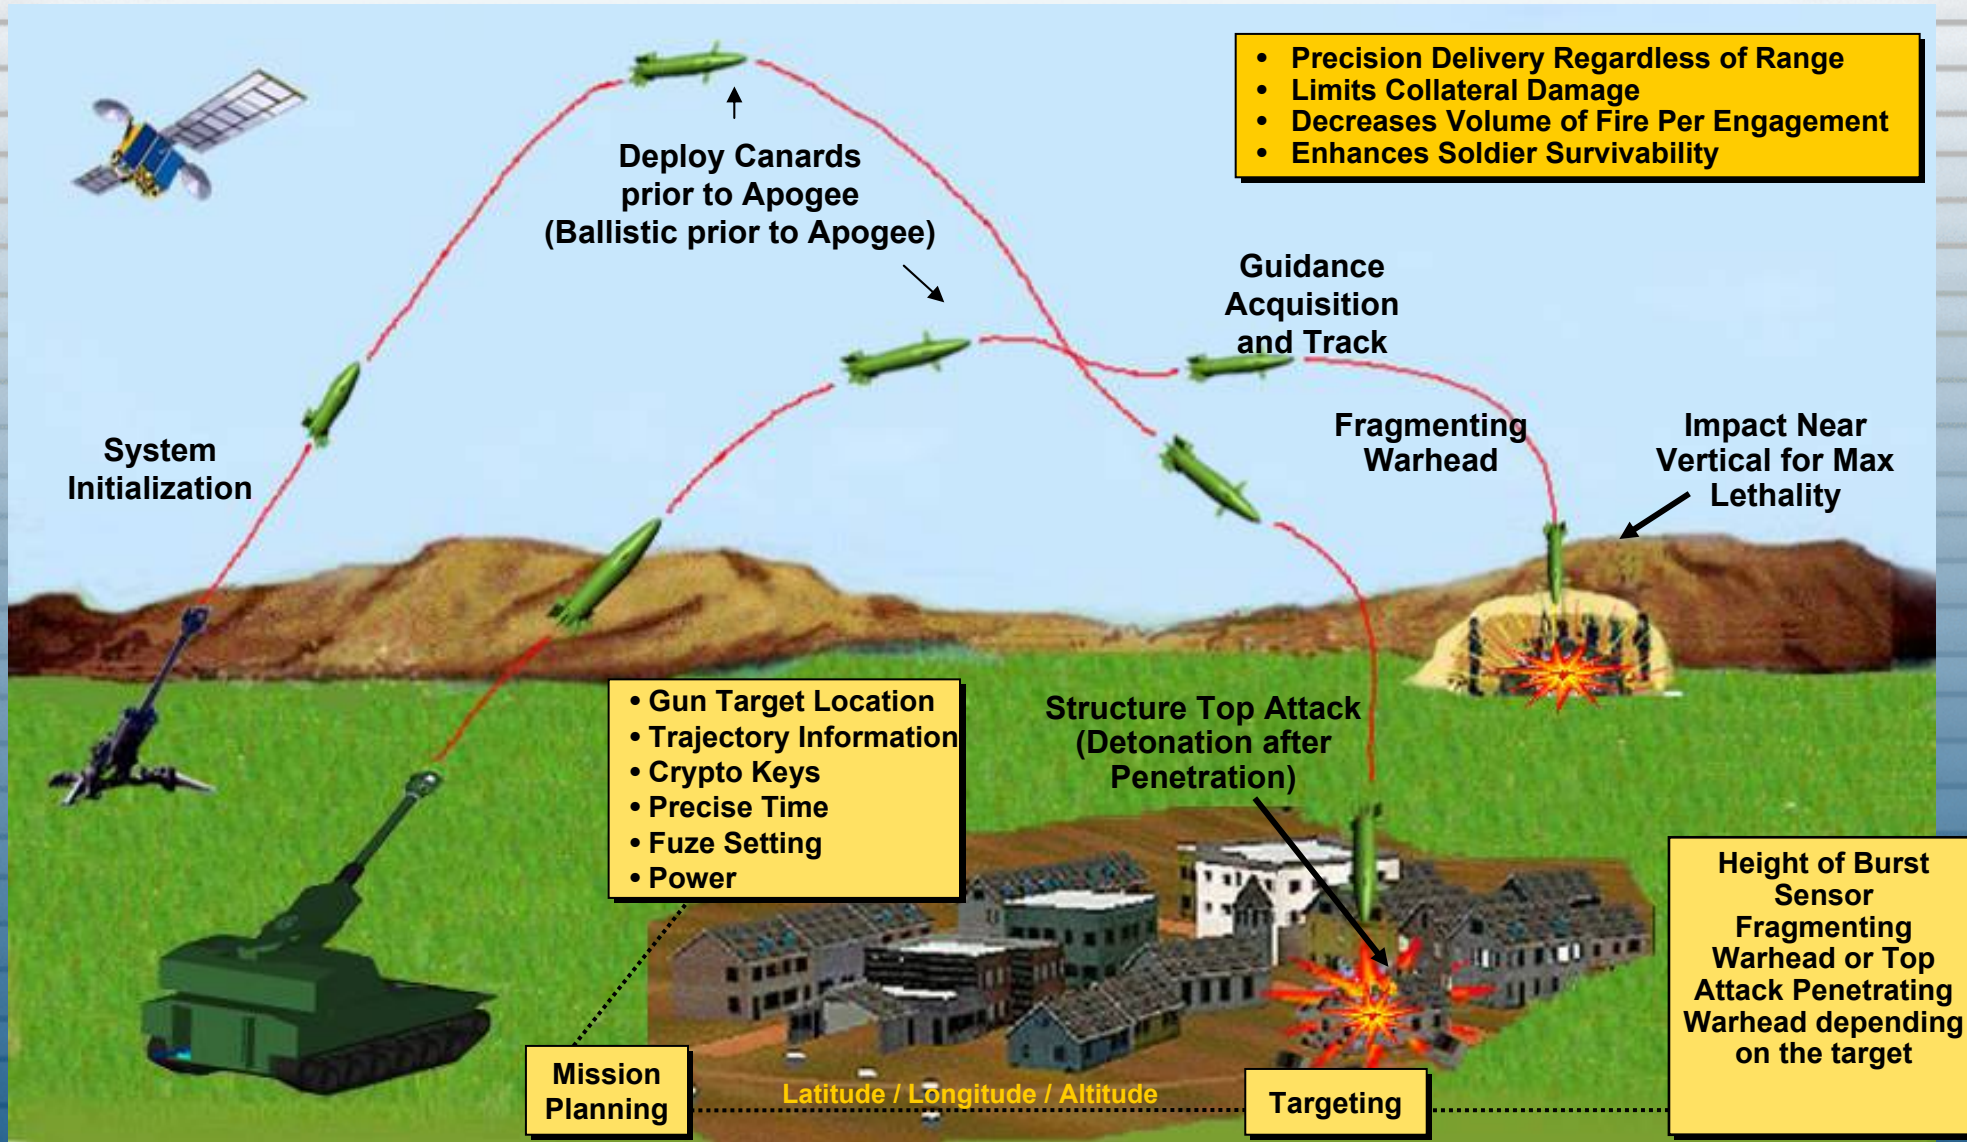

# Excalibur Characteristics Unitary Targets



## Infantry Platoon

Excalibur: 3 rounds  
M549: 25 rounds  
M107: 43 rounds

- ~10m CEP
- Same lethality as an 155 mm HE

**System used in  
a complex  
target  
environment!**



## Command Post

Excalibur: 6 rounds  
M549: 54 rounds  
M107: 78 rounds



## Radar

Excalibur: 1 round  
M549: 10 rounds  
M107: 11 rounds

**Excalibur at any range**

**M549 at 20Km**


**M107 at 15Km**



## Structures

Excalibur: 3 rounds  
M549: 147 rounds  
M107: 110 rounds

# Excalibur Fuzing System (FS&A w/HOB)

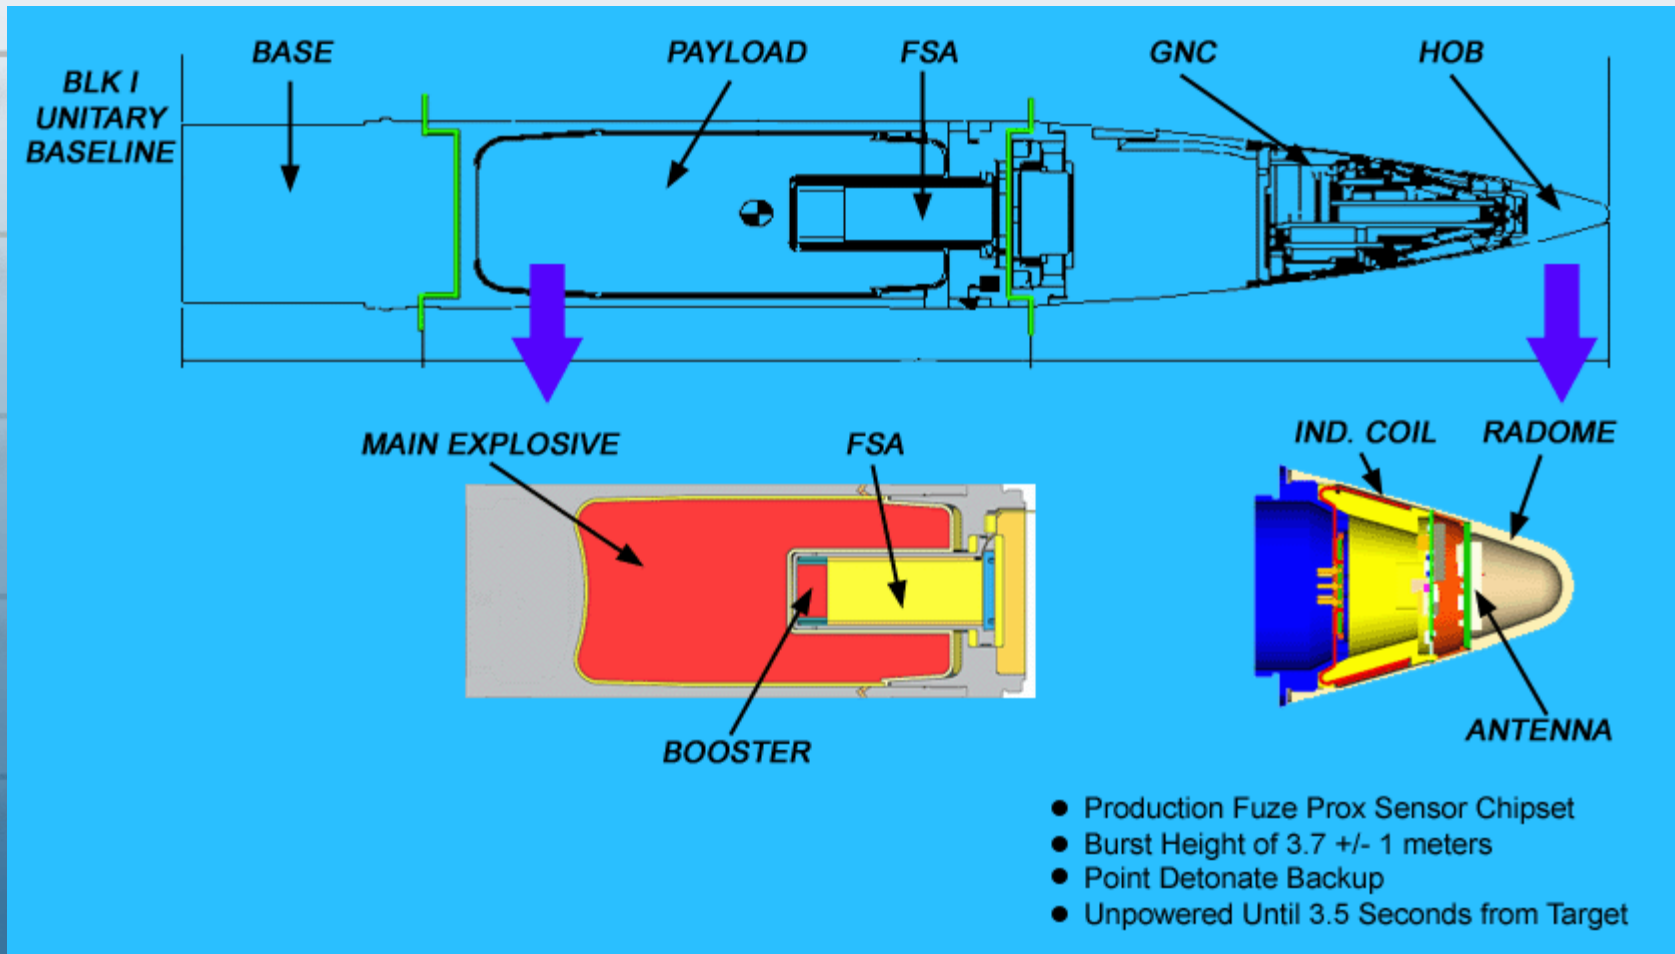




# FS&A REQUIREMENTS

- Projectile Application
  - All Arm - 1,700 G's
  - No Arm - 300 G's
- Spin
- Interface With GN&C
- MIL-STD-1316 Compliant


ERGM and Excalibur  
Mechanical S&A



# Excalibur FSA /Flight Timeline

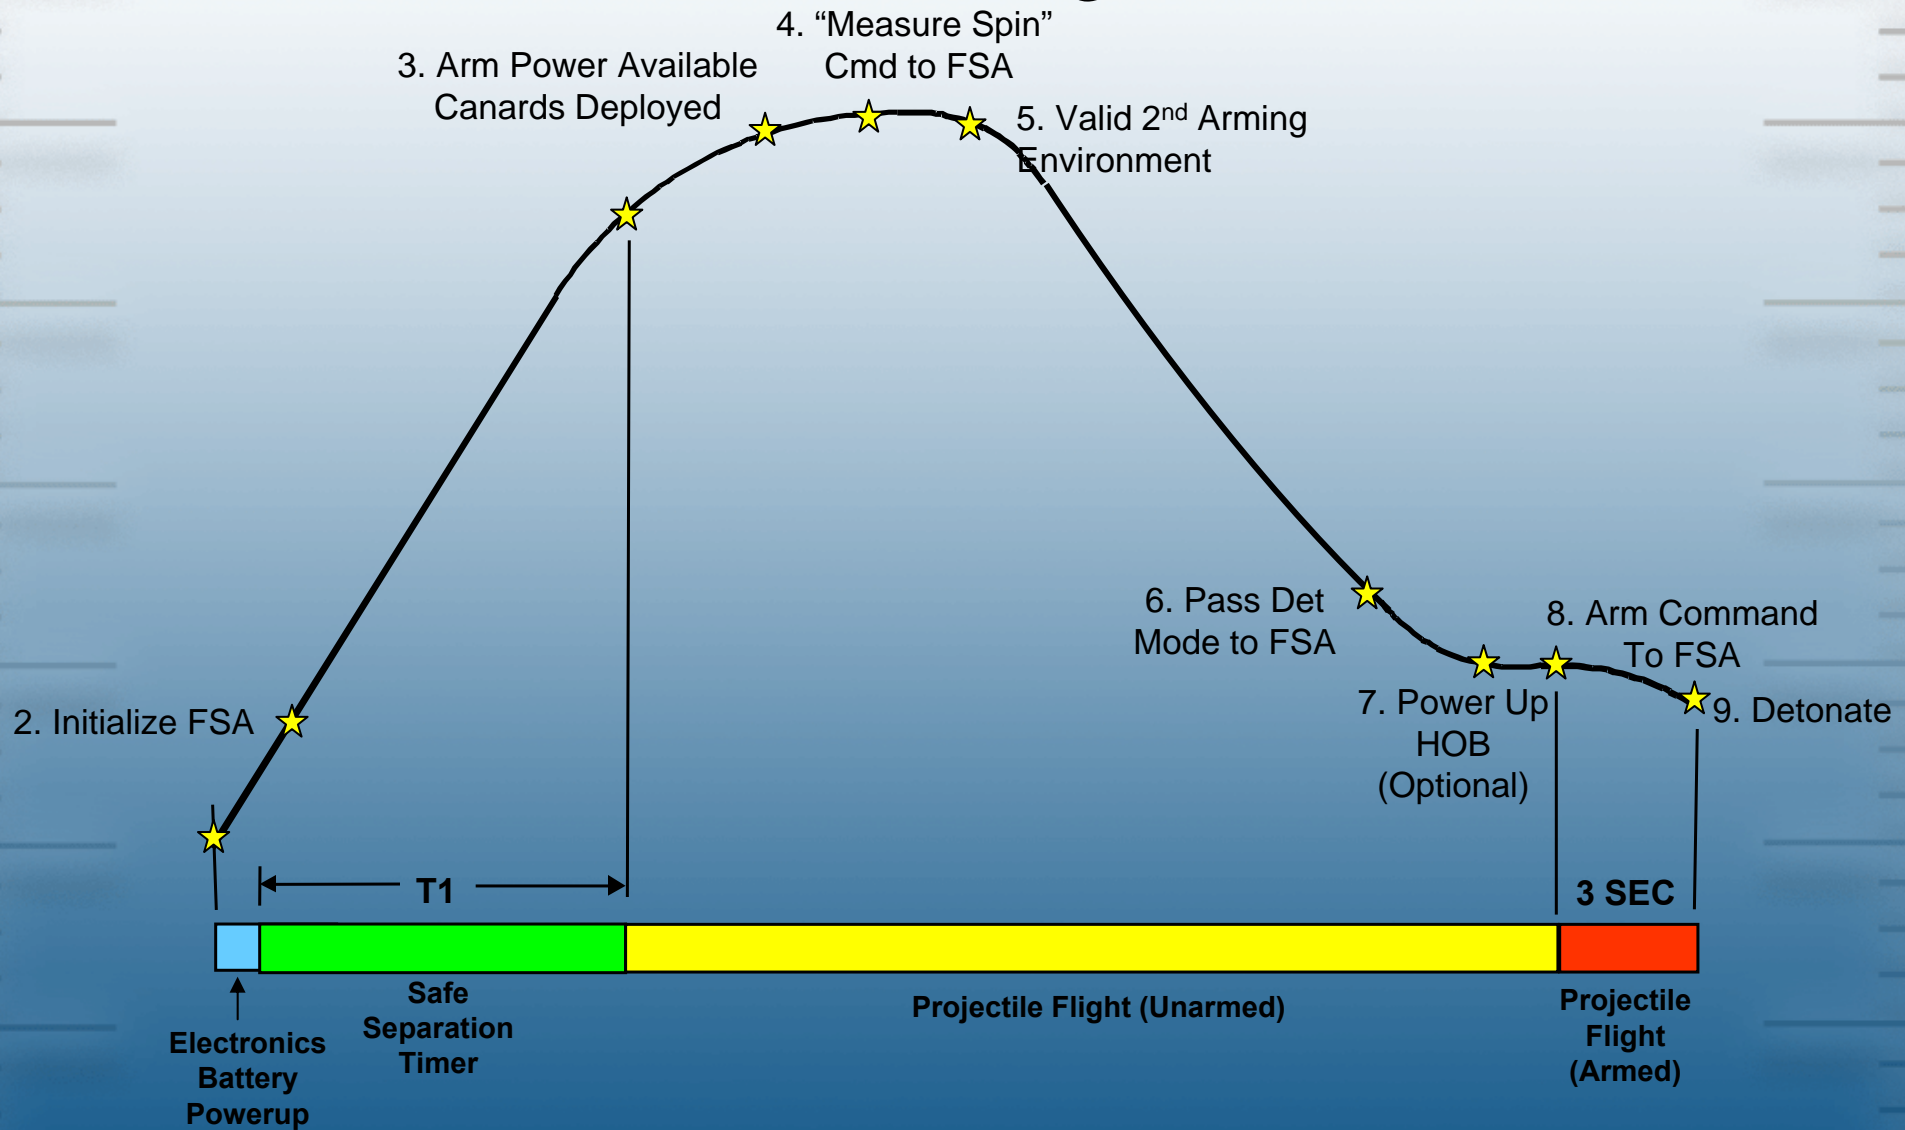

# Excalibur FSA Logic Diagram

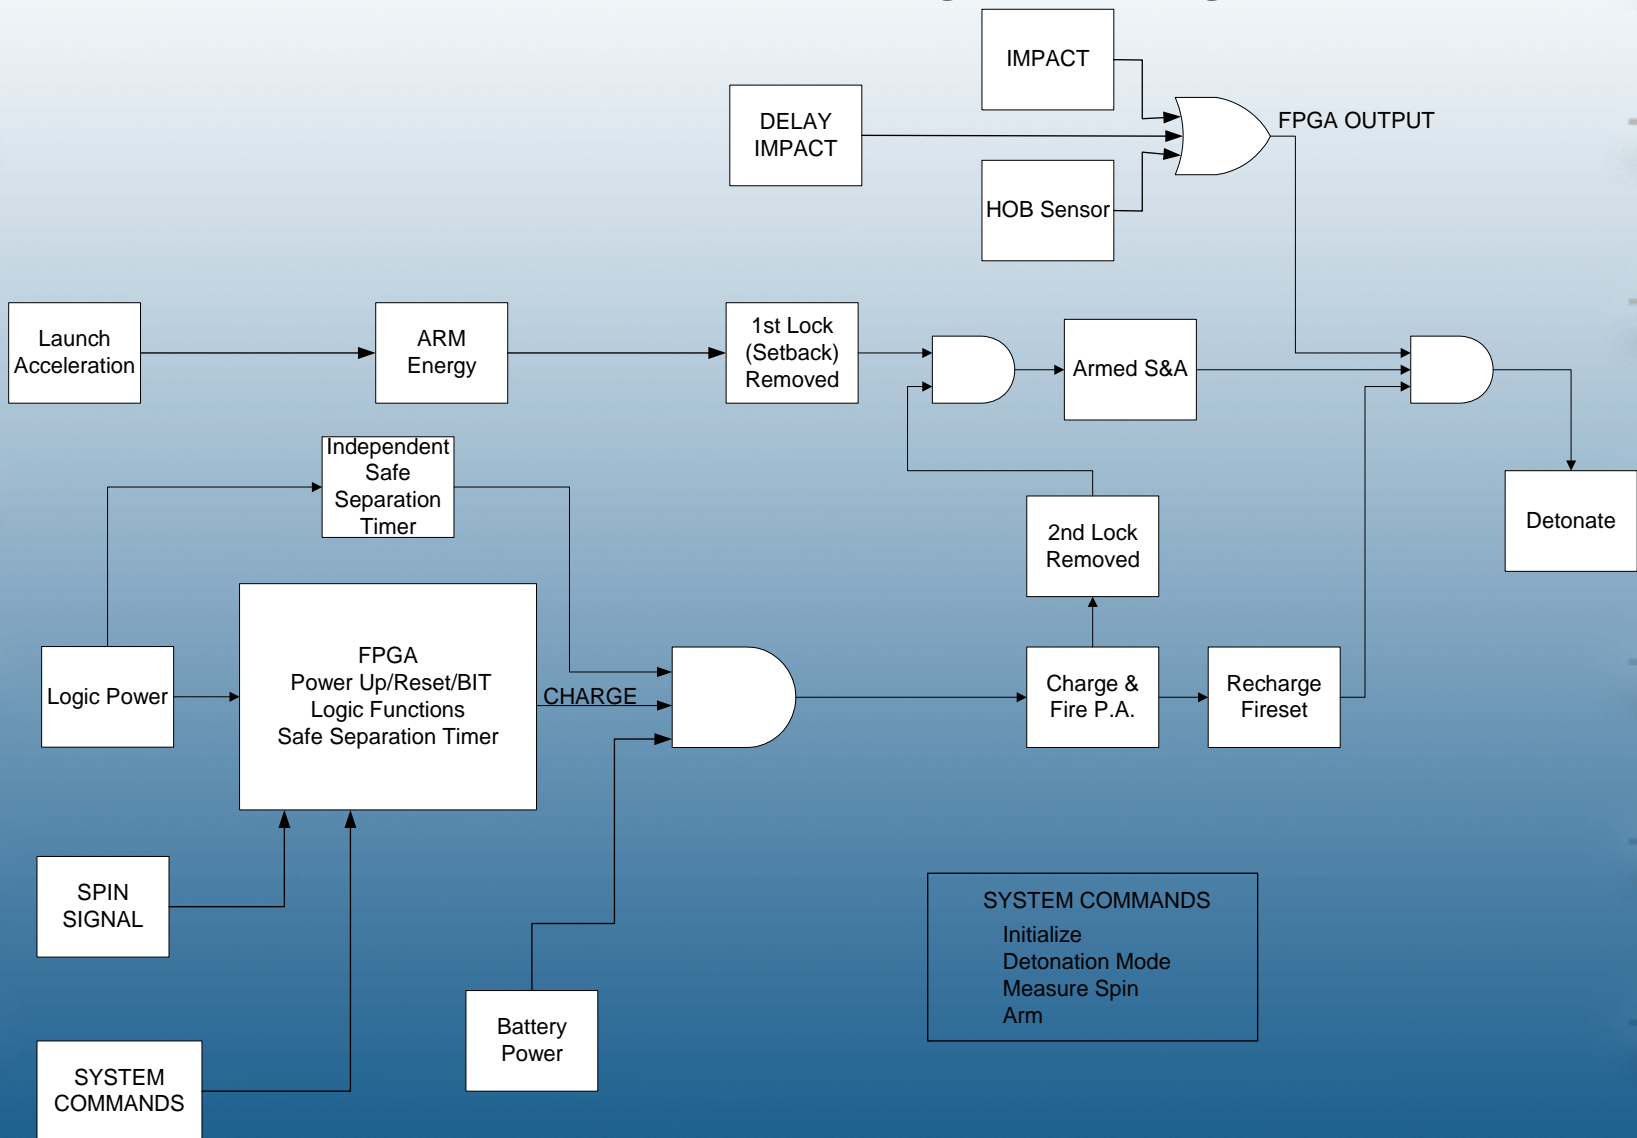

# Excalibur Fuze Safe & Arm (FSA) Description

## Key Features

- FSA consists of electronics module and mechanical module
- First Arming Environment is setback acceleration implemented mechanically
- Second Arming Environment is detection of de-spin event using a “g” switch
- Safe separation via independent timers
- Point Detonate fuze is implemented by a g-switch opening at impact.
- Delay after Point Detonate implemented by electronic timer
- HOB function implemented by RF proximity sensor using production fuze components




## Mechanical Section

Out of Line Mech  
Setback G-switch  
Rotor Control  
Detonator Shorting  
Detonator  
Output Lead

## Electronics Section


FPGA  
Power Up Logic  
Power Separation  
Timing Circuits  
Spin Sensing  
Arming Control  
Firing Control

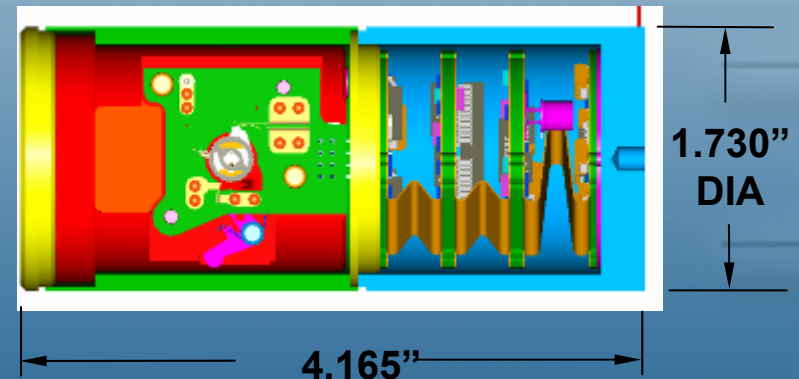


**FSA Design Approach Concurred by Army & FMV Fuze Boards**

# S&A MECHANICAL DESIGN APPROACH

- Mechanical S&A Design Approach
  - Modified MK18 S&A
    - Higher G Loads
    - AFT Detonation Output
    - Switches Indicate Rotor Position
    - Integrated Electronics Control
  - Three (3) Leaf Set Back Mechanism

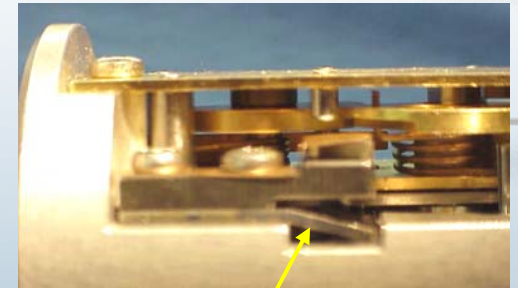

Second Rotor Lock (Safe)


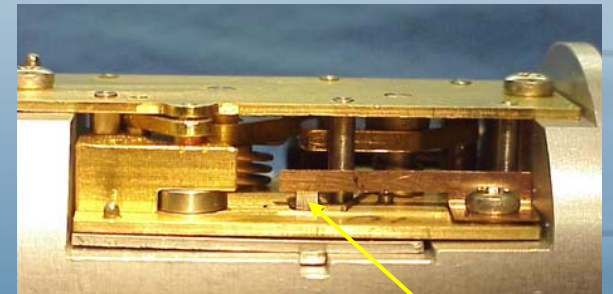


Leaf Lock

Rotor Drive Spring

First Rotor Lock (Safe)


Rotor Lock (Arm)

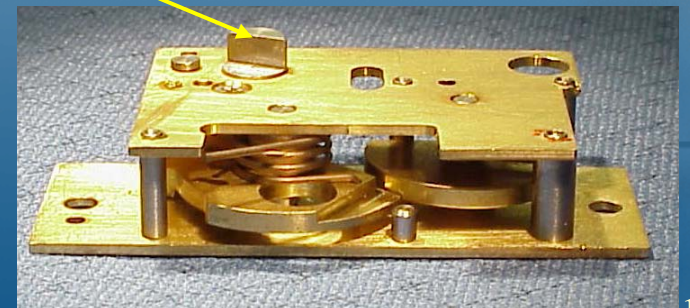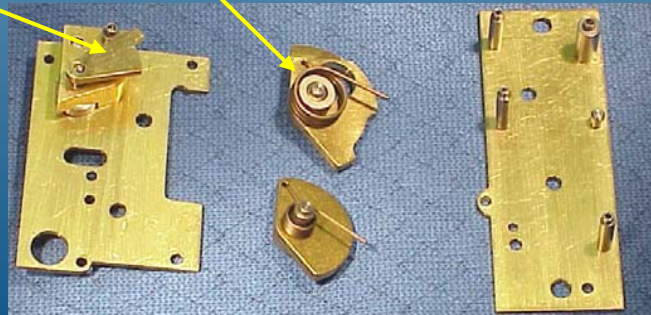

# S&A ELECTRICAL DESIGN APPROACH

- S&A Electronics
  - RS232 Serial Communication Link
  - Codeword Controls Function

Second Safety & Arm Lock

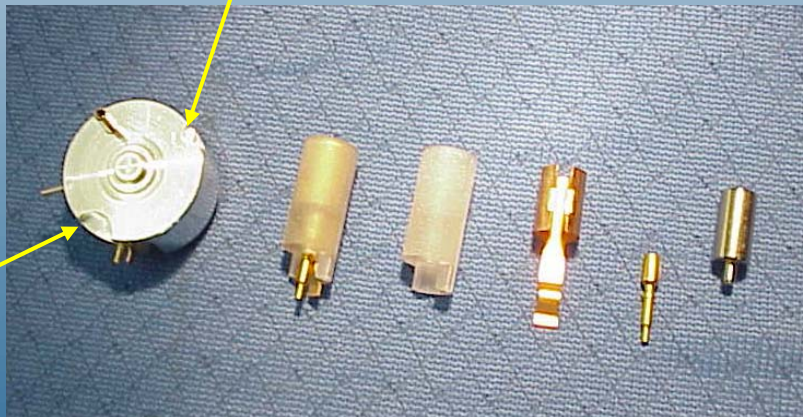


Set Back Lock

Rotor W/Switches & M84 Detonator

GN&C


Second Rotor Lock W/PA

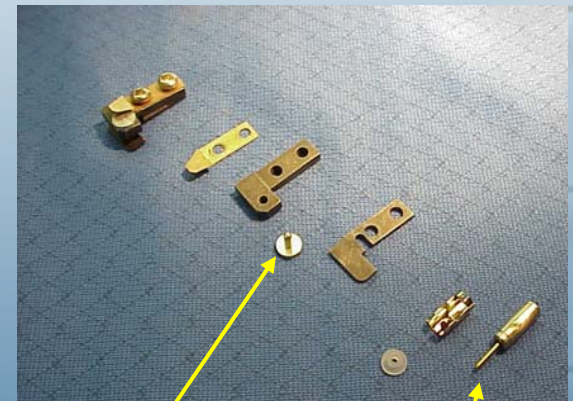


Safety Button

Piston Actuator

# Excalibur Electronic Flex Assembly Module

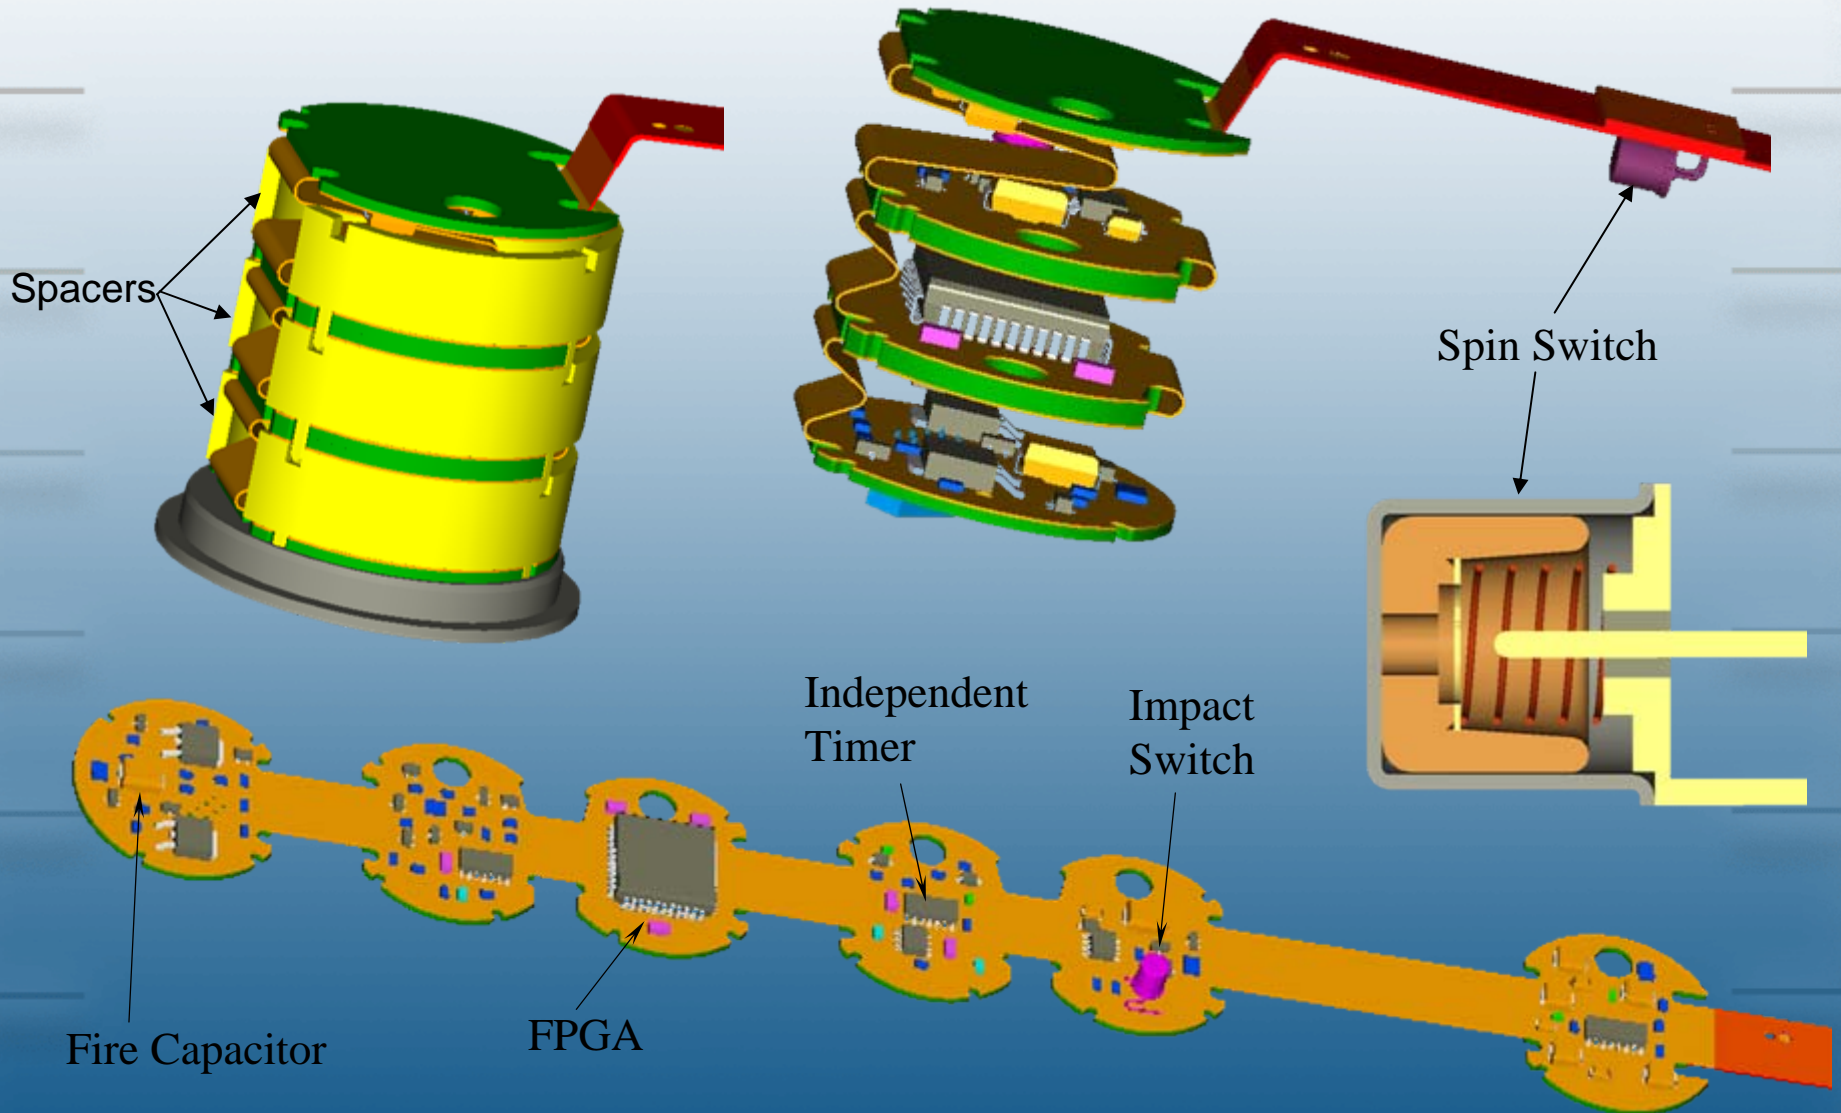


# Excalibur FSA Electronic Sub-Assembly

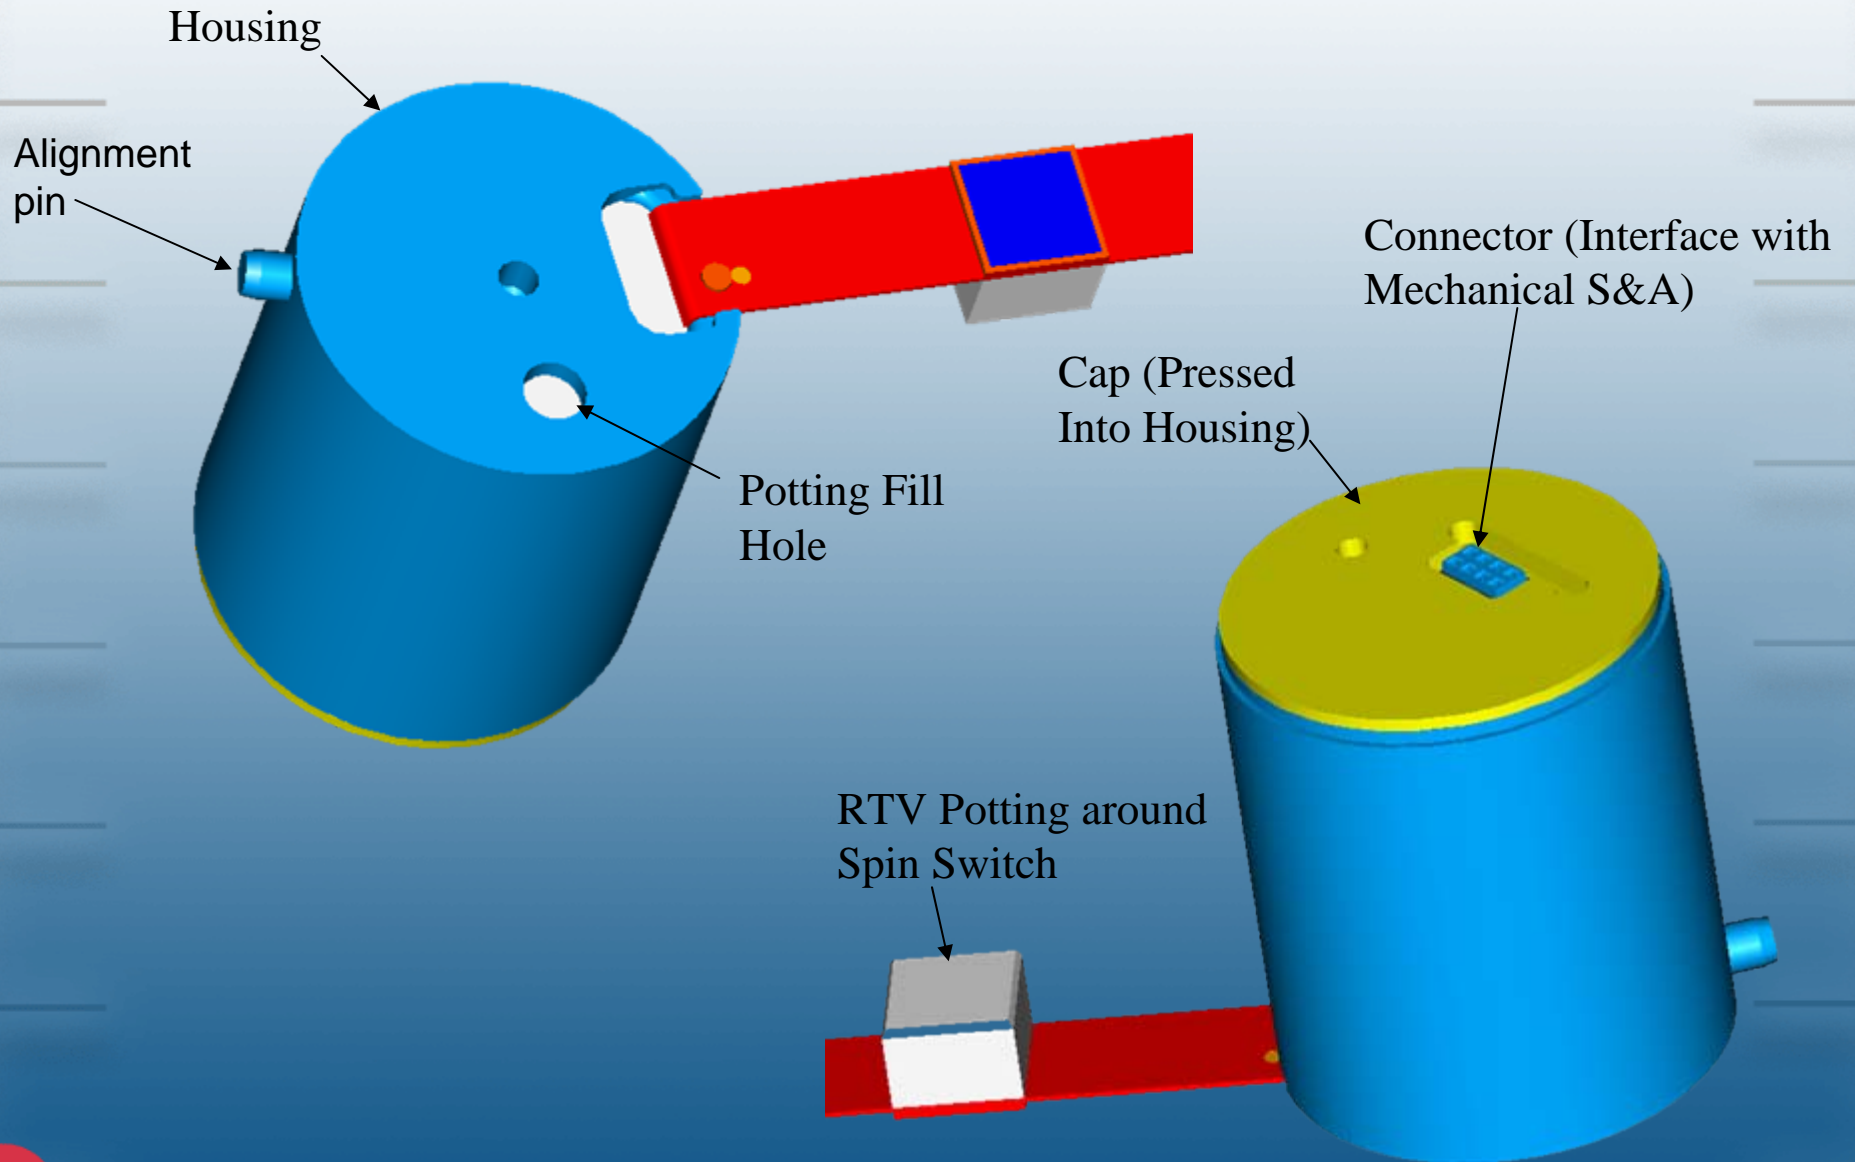




# EXCALIBUR AFT FIRING S&A ASSEMBLY (25270510-01)

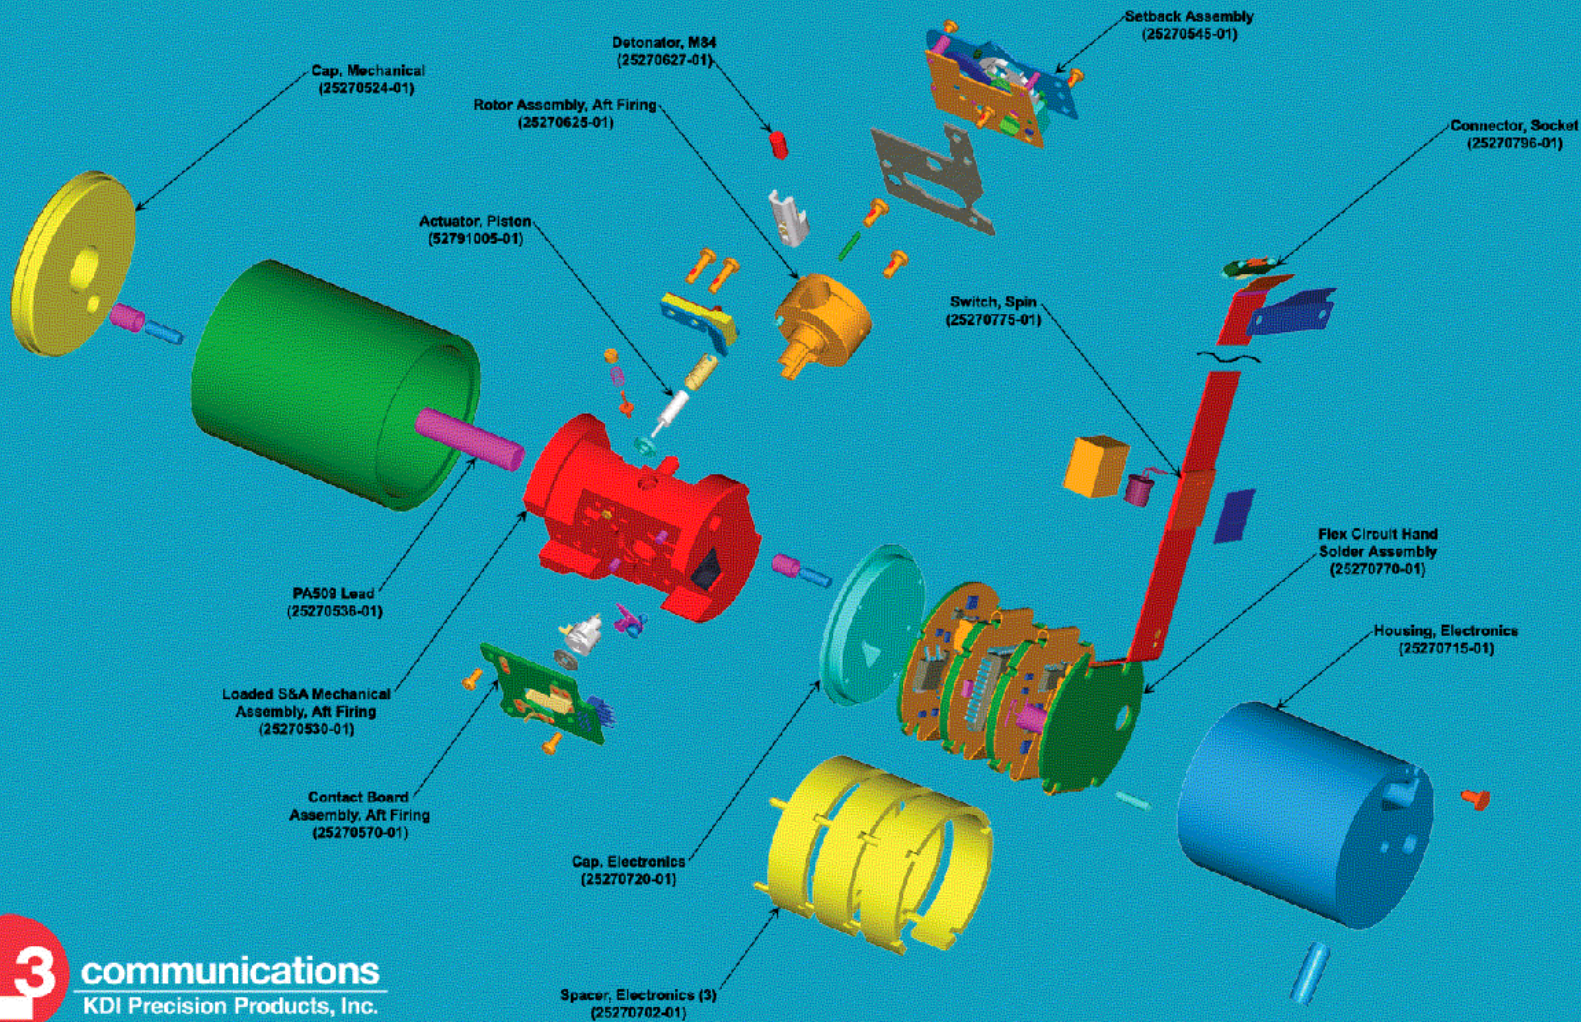

# Excalibur FSA




# Explosive Train

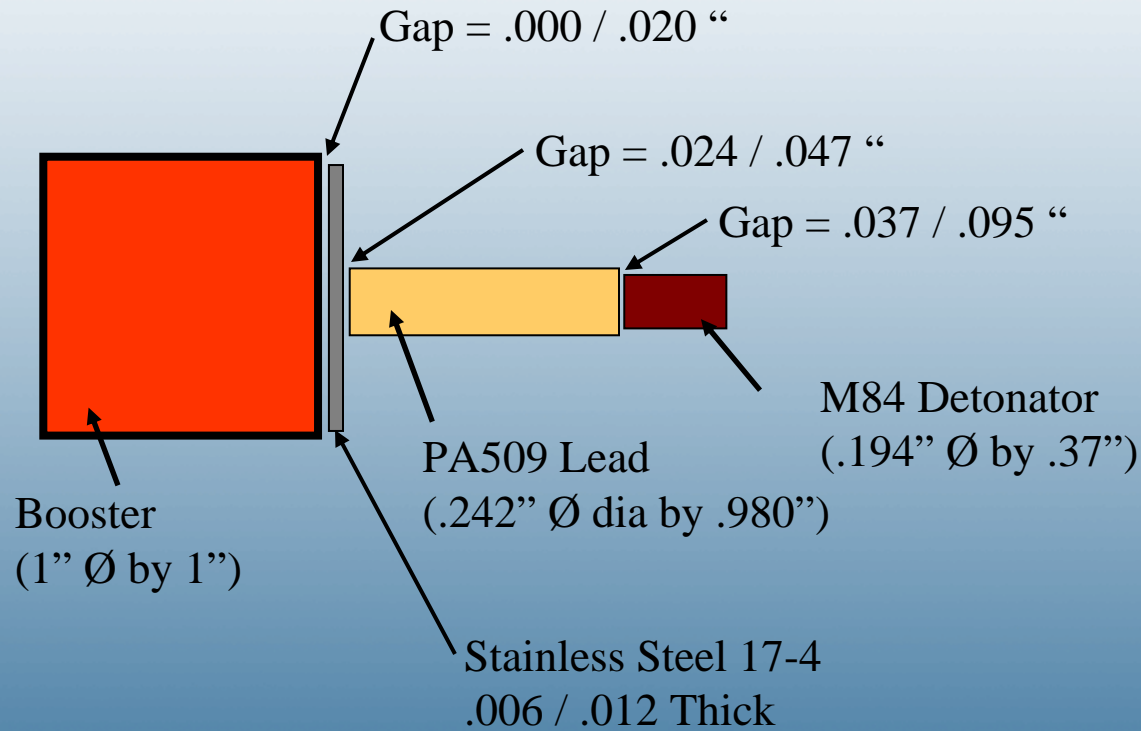

# Excalibur

## Height of Burst (HOB) Sensor

Module (25271000-01) Phase 2 – Qualification Configuration

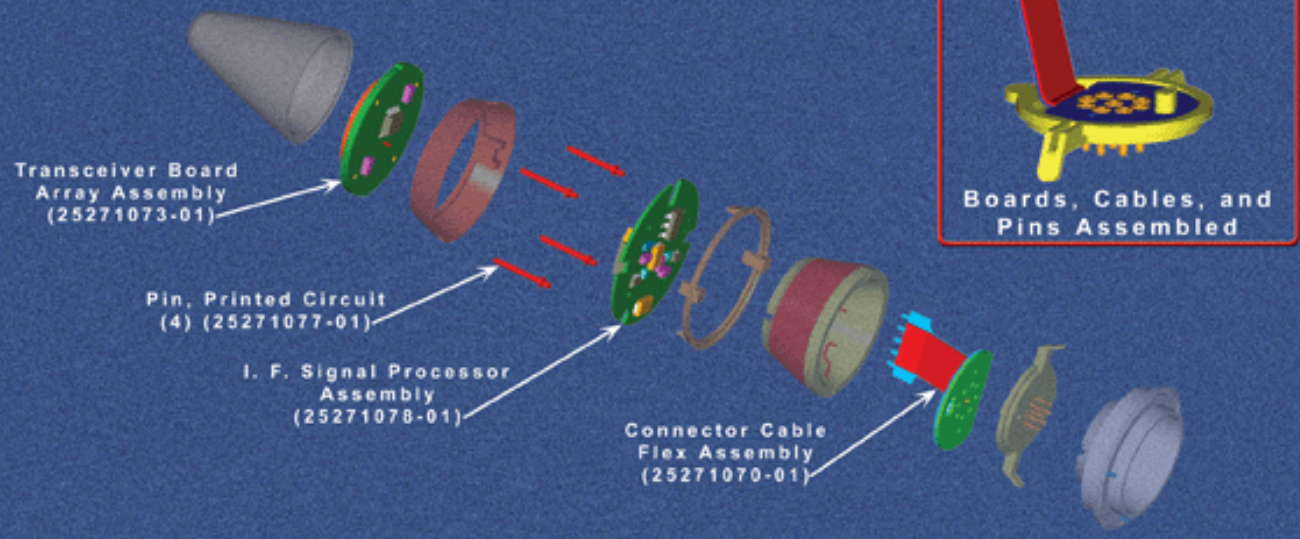

- Production Fuze Prox Sensor Chipset
- Burst Height of 3.7 +/- 1 meters
- Point Detonate Backup
- Unpowered Until 3.5 Seconds from Target

# FSA Design Summary

- Resulting Capabilities
  - Meets MIL-STD-1316
  - Interactive W/ GN&C
  - Maximized Overhead Safety
    - Independent Timer
    - Arm Command issued Just Prior to Endgame
  - Excalibur was Fielded in May 2007 for Operation Use



ERGM

M982



# S&A Program Milestones

- M982 (Excalibur) S&A
  - Completed Design Analysis, Design Verification Testing, Qualification, and AFSRB Certified
  - The Excalibur System was Fielded in May 2007 and is Currently in Operational Use
  - KDI is Under Contract to Develop a Low Cost ESAD Alternative S&A Design
- ERGM S&A
  - Finished DVT
  - ERGM has been terminated. The requirement for a guided extended range munition is still valid. NAVSEA is currently restructuring the program.

# Excalibur ESAD Development

- Development team consisted of members from KDI, ARDEC fuze group at Picatinny and Adelphi
- Development program objectives accomplished
  - Drop-in replacement with existing S&A
  - Lower Unit Production Cost
  - Increased reliability
  - Hardware tests used to mitigate initial high risk areas
  - 1<sup>st</sup> Environment sensor designed, developed and tested
  - AFSRB informal and formal review completed
  - Preliminary Design Review completed
- Electrical and mechanical design completed
  - Functional hardware fabricated and tested
    - Explosive function test success
    - ARDEC airgun and railgun mechanical shock tests successfully completed (gun launch simulated)
    - EGLIN AFB howitzer hard target penetration tests successfully completed